

## RXO fixed vanes swirl diffusers

# MADEL<sup>®</sup>

**RXO** swirl diffusers are designed to be applied in air conditioning ventilation and heating systems.

They can be mounted in false ceilings or suspended from the ceiling.

The design of their vanes and its radial arrangement in the diffuser cause swirl air supply with a coanda effect, which provides a high level of induction rate of the air in the atmosphere and reducing the stratification.

Their sectored vanes emit a uniform air flow all over the passage section. The **RXO** series diffusers are designed for both CAV and VAV installations. These diffusers can be used from 2,6 up to 4 meters high and at a temperature differential up to 12°C.


Models:

**RXO-S**


**RXO-KLIN**

**RXO-C**



**RXO-S**



**RXO-S/SR/**



**RXO-S.../T.../**



	E	A	B
400	395	370	340
500	495	470	440
600	595	568	538
610	605	568	538
625	620	568	538
675	670	568	538

**RXO-S**

**Classification**

**RXO-S** Square diffuser with vanes in circular radial arrangement.

**.../SR/** Reduced face area in relation to the diffuser size.


**.../T15/** Panel with angled borders to replace an angled ceiling tile profile 15 mm.

**.../T24/** Panel with angled borders to replace an angled ceiling tile profile 24 mm.


**Material**

Diffuser constructed from galvanised steel. All diffusers are provided with a seal on the back of the frame in order that the perimeter in contact with the plenum box or the ceiling is airtight.

**BOXSTAR/**

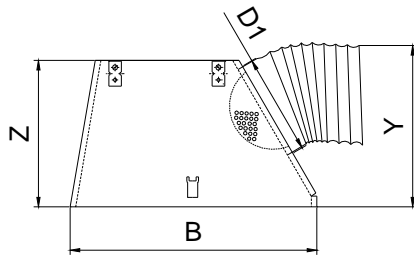


**BOXSTAR /S/**



	B	Z	Y	D1
300	290	250	275	123
310	303	250	275	123
400	390	300	325	198
500	490	300	325	198
600-D1:250	590	350	375	248
600-D1:200	590	300	325	198
610-D1:250	600	350	375	248
610-D1:200	600	300	325	198
625-D1:250	615	350	375	248
625-D1:200	615	300	325	198
675-D1:250	665	350	375	248
675-D1:200	665	300	325	198

**BOXTHERM**

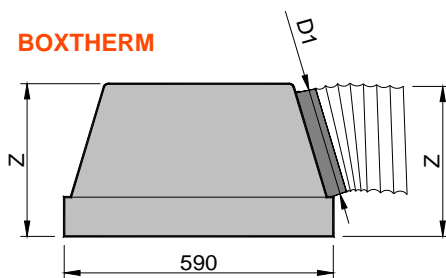

	Z	D1
BOXTHERM 600-DIAM250	350	248
BOXTHERM 600-DIAM200	300	198

**Accessories**

**BOXSTAR** Plenum box with a lateral circular connection. It includes supports to hang from the ceiling. The crossbar is supplied separately to be assembled manually on the work site. Made in galvanised steel.

**...-R** Plenum box with a flow damper in the spigot.

**.../S/** Plenum box with an upper connection.

**.../AIS/** Thermally insulated plenum box with foam. Density 30 kg / m<sup>3</sup> ISO 845. Thermal conductivity 20° C\_0,040 W / m°K ISO 3386/1.

Classified reaction to fire B-s2, d0 EN 13501-1.


**BOXTHERM** Plenum box thermo acoustically insulated with a lateral circular connection.

**...-R** Plenum box with a flow damper in the spigot.

**PMXO** Crossbar suitable for mounting in false ceiling with rectangular duct.

### Fixing systems

1)



1) Connection into the crossbar or to the plenum box by means of central screw.


### Finishes

**M9016** Painted in white similar to RAL 9016.

**R9010** Painted in white RAL 9010.

**RAL...** Painted in other RAL colours.

1)

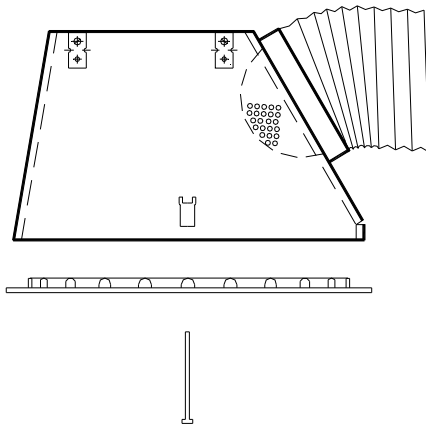


### Specification text

Supply and mounting of square swirl diffuser with fixed blades with radial vanes series

**RXO-S+BOXSTAR-R M9016 dim. 600**

constructed from galvanised steel paint in white **M9016**. With lateral circular connection pyramidal plenum box and air flow damper in the spigot **BOXSTAR-R**. Manufacturer **MADEL**.

**RXO-S-KLIN**

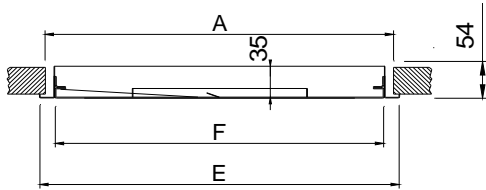

	E	A	F
400	395	369	345
500	495	469	445
600	595	569	545
610	605	579	555
625	620	594	570
675	670	644	620
600-400	595	569	545
600-500	595	569	545
610-400	605	579	555
610-500	605	579	555
625-400	620	594	570
625-500	620	594	570
675-400	670	644	620
675-500	670	644	620

**RXO-S-KLIN**

**Classification**

**RXO-S-KLIN** Hinged removable core diffuser for the easy access to the installations above the ceiling with no need of tools, by means of PUSH fasteners. By slightly pressing on the invisible latch, the core opens, remaining hinged on one side. If necessary the core can be easily removed for maintenance of HVAC installations.

**Material**

Diffuser constructed from galvanised steel.

**Accessories**

**PLK** Plenum box fixed to the diffuser with an upper connection. Made in galvanised steel.


**...-R** Plenum box with a flow damper in the spigot.

**.../L** Plenum box with a lateral connection.


**.../AIS/** Thermally insulated plenum box with foam. Density 30 kg / m<sup>3</sup> ISO 845. Thermal conductivity 20° C\_0,040 W / m<sup>2</sup>K ISO 3386/1.

Classified reaction to fire B-s2, d0 EN 13501-1.

**RXO-S-KLIN+PLK...-R**



**RXO-S-KLIN+PLK/L...-R**



	E	F	D1	H	C
400	395	365	198	205	320
500	495	465	248	286	370
600	595	565	313	353	435
610	605	575	313	353	435
625	620	590	313	353	435
675	670	640	313	353	435

1)



### Fixing systems

1) Fixing with supports to hang from the ceiling with drops rods.

### Finishes

**M9016** Painted in white similar to RAL 9016.



**R9010** Painted in white RAL 9010.

**RAL...** Painted in other RAL colours.

### Specification text


Supply and mounting of square swirl diffuser with fixed blades with hinged removable core without tools, by pressing on the invisible PUSH fasteners series **RXO-S-KLIN+PLK-R M9016 dim. (mm)** constructed from galvanised steel paint in white **M9016**. With upper circular connection plenum box and air flow damper in the spigot **PLK-R**. Manufacturer **MADEL**.

**RXO-C**



	E	A	B
400	400	370	340
500	500	470	440
625	625	568	538

**PLXOC**

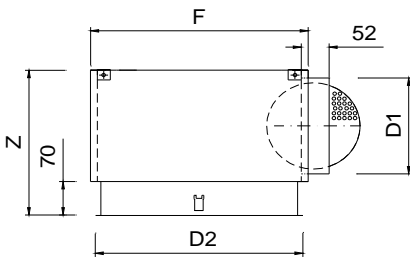

	D2	F	Z	D1
400	395	415	300	198
500	495	515	300	198
625	620	640	350	248

**RXO-C**

**Classification**

**RXO-C** Circular diffuser with vanes in circular radial arrangement.

**Material**

Diffuser constructed from galvanised steel. All diffusers are provided with a seal on the back of the frame in order that the perimeter in contact with the plenum box or ceiling is airtight.

**Accessories**

**PLXOC** Plenum box with a lateral circular connection. Made in galvanised steel.

**...-R** Plenum box with a flow damper in the spigot.


**.../S/** Plenum box with an upper connection.

**.../AIS/** Thermally insulated plenum box with foam. Density 30 kg / m<sup>3</sup> ISO 845. Thermal conductivity 20° C\_0,040 W / m°K ISO 3386/1.

**PMXO** Crossbar suitable for mounting in false ceiling with rectangular duct.

### Fixing systems

1)



1) Connection into the crossbar or to the plenum box by means of central screw.


### Finishes

**M9016** Painted in white similar to RAL 9016.

**R9010** Painted in white RAL 9010.

**RAL...** Painted in other RAL colours.

1)

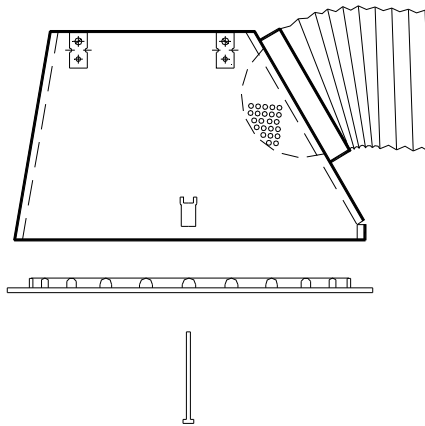

### Specification text

Supply and mounting of circular swirl diffuser with fixed blades with radial vanes series **RXO-C+PLXOC-R M9016 dim. 600** constructed from galvanised steel paint in white **M9016**. With lateral circular connection plenum box and air flow damper in the spigot **PLXOC-R**.  
Manufacturer **MADEL**.






# RXO-S

(Technical data equal to 600, 610, 625 or 675)

# MADEL®



### RECOMMENDED VELOCITY.


RXO	Vmin m/s	Vmax m/s
400	2.5	6,8
500	2.5	5
600	2.5	4.5
625	2.5	4.5

FREE VELOCITY, PRESSURE LOSS AND SOUND POWER LEVEL,  
THROW WITH CEILING EFFECT.

### RXO-S + BOXSTAR

### FREE FACE AREA (m2).

RXO	Afree m2	Qmin. m3/h	Qmax. m3/h
400	0.0165	150	409
500	0.0336	300	600
600	0.05	500	810
625	0.05	500	810

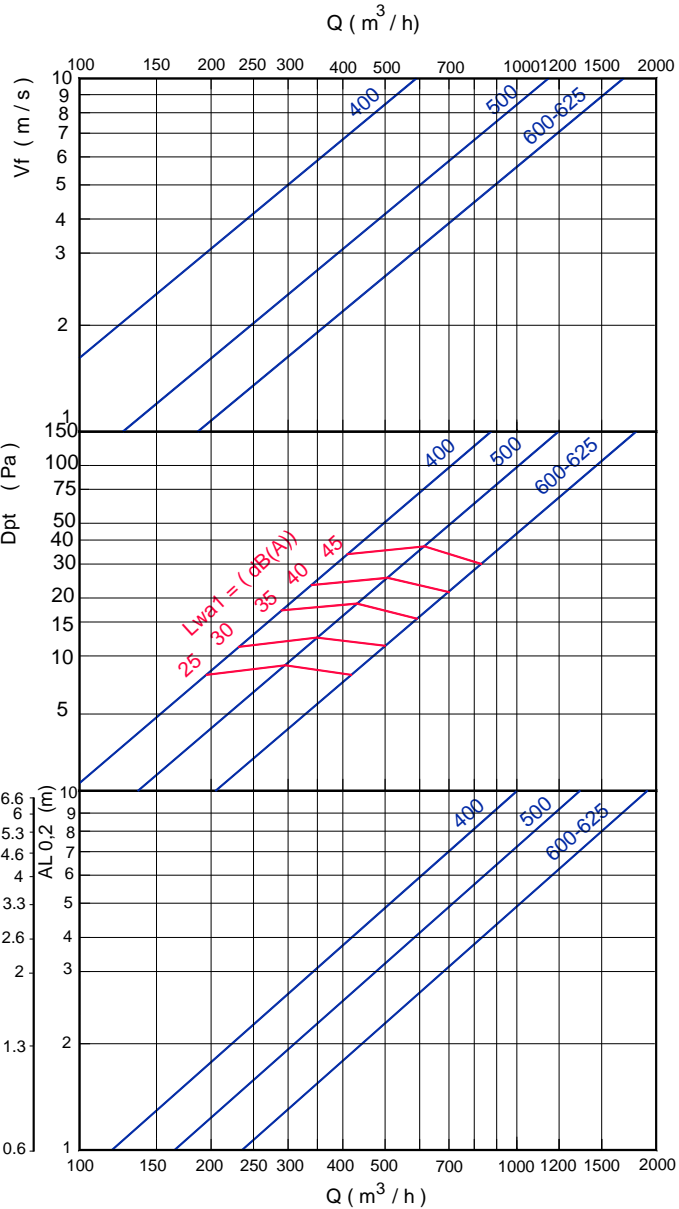


### CORRECTION FACTOR FOR DPT AND Lwa1.

BOXSTAR-R	100% Open			
	Dpt (Kp)	50% Open	10% Open	
400	Dpt (Kp)	1	1.3	2
	Lwa1 (Kf)	+0	+3,2	+1,8
500	Dpt (Kp)	1	1.7	3,3
	Lwa1 (Kf)	+1	+4,5	+2
600	Dpt (Kp)	1	1.5	5,8
	Lwa1 (Kf)	+0,3	+3,5	+2,5
625	Dpt (Kp)	1	1.5	5,5
	Lwa1 (Kf)	+0,3	+3,5	+2,5

$$Dpt1 = Kp \times Dpt$$

$$Lwa = Lwa1 + Kf$$

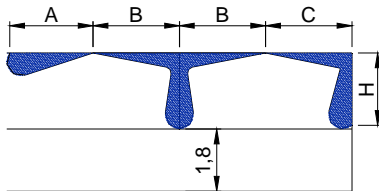

$$AL_{0.2} = A$$

$$AL_{0.2} = B+H$$

$$AL_{0.2} = C+H$$


Note: In MadelMedia Octava band centre frequency in Hz.




**RXO-S**

(Technical data equal to 600, 610, 625 or 675)

**MAD E L**®




CORRECTION FACTOR FOR VERTICAL DIFFUSION (bv) FOR DT (-).

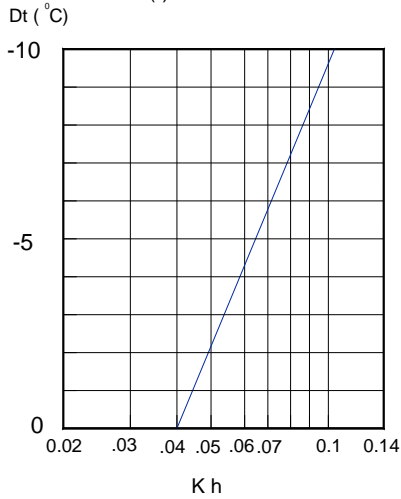


Kh = Correction factor for the vertical diffusion.

CORRECTION FACTOR FOR THROW (L0.2) DT (-).

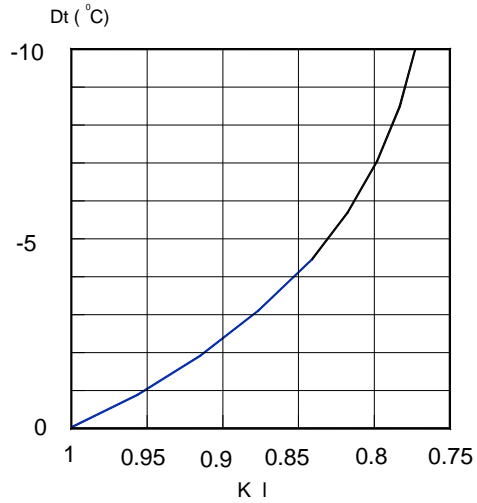

KI = Correction factor for the throw.

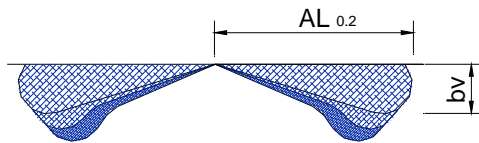

$$bv = Kh \times Al_{0.2}$$



$$AL'_{0.2} (Dt < 0) = KI \times AL_{0.2}$$

TEMPERATURE RATIO.

$$\frac{Dtl}{Dtz} = \frac{t_{room} - t_x}{t_{room} - t_{supply}}$$

INDUCTION RATIO.

$$i = \frac{Q_r}{Q_0} = \frac{Q_{total\ at\ x}}{Q_{of\ supply}}$$

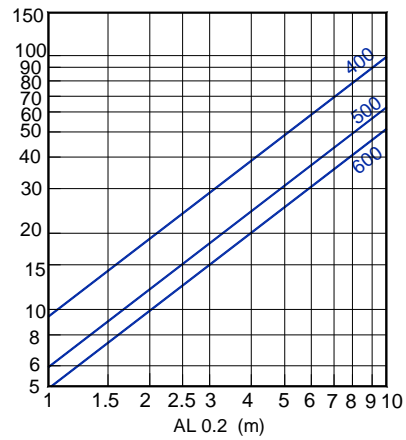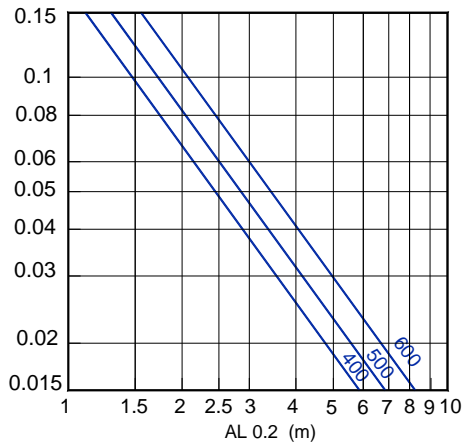




# RXO-KLIN

(Technical data equal to 600, 610, 625 or 675)

# MADEL®



### RECOMMENDED VELOCITY.


RXO KLIN	Vmin m/s	Vmax m/s
400	2.5	6,8
500	2.5	5
600	2.5	4.5
625	2.5	4.5

FREE VELOCITY, PRESSURE LOSS AND SOUND POWER LEVEL, THROW WITH CEILING EFFECT.

### RXO-KLIN + PLFZ

### FREE FACE AREA (m2).

RXO KLIN	Afree m2	Qmin. m3/h	Qmax. m3/h
400	0.0165	150	409
500	0.0336	300	600
600	0.05	500	810
625	0.05	500	810

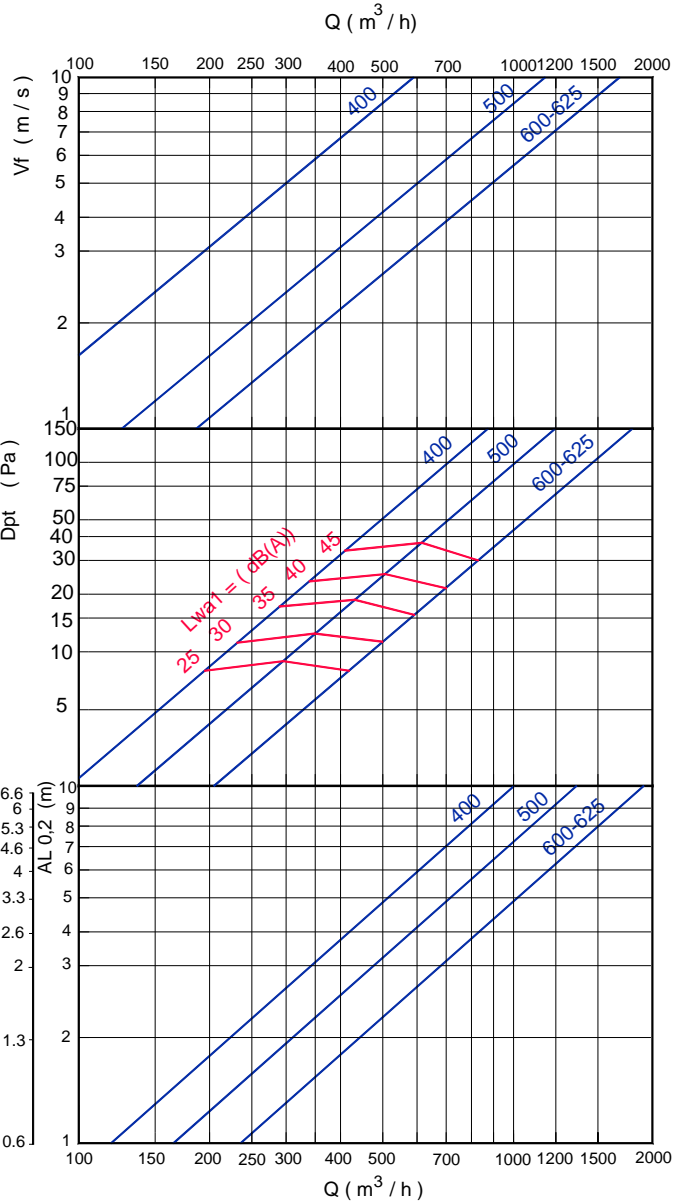


### CORRECTION FACTOR FOR DPT AND Lwa1.

PLFZ-R		100% Open	50% Open	10% Open
		400	Dpt (Kp) 1	1.3
	Lwa1 (Kf)	+0	+3,2	+1,8
500	Dpt (Kp)	1	1.7	3,3
	Lwa1 (Kf)	+1	+4,5	+2
600	Dpt (Kp)	1	1.5	5,8
	Lwa1 (Kf)	+0,3	+3,5	+2,5
625	Dpt (Kp)	1	1.5	5,5
	Lwa1 (Kf)	+0,3	+3,5	+2,5

$$D_{Pt1} = K_p \times D_{Pt}$$

$$L_{wa} = L_{wa1} + K_f$$

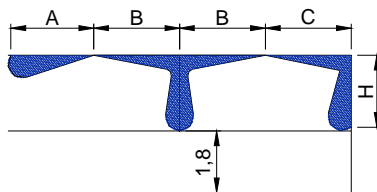

$$AL_{0.2} = A$$

$$AL_{0.2} = B+H$$

$$AL_{0.2} = C+H$$


Note: In MadelMedia Octava band centre frequency in Hz.




**RXO-KLIN**

(Technical data equal to 600, 610, 625 or 675)

**MADDEL**<sup>®</sup>




**CORRECTION FACTOR FOR VERTICAL DIFFUSION (bv) FOR DT (-).**

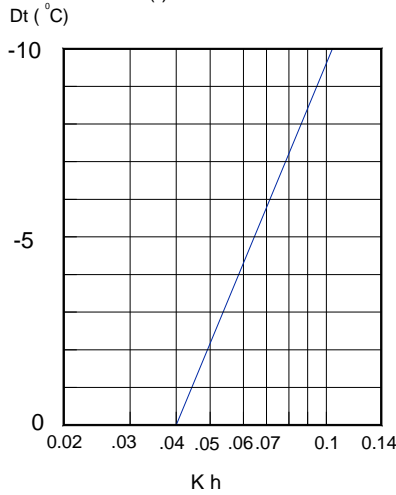


Kh = Correction factor for the vertical diffusion.

**CORRECTION FACTOR FOR THROW (L0.2) DT (-).**

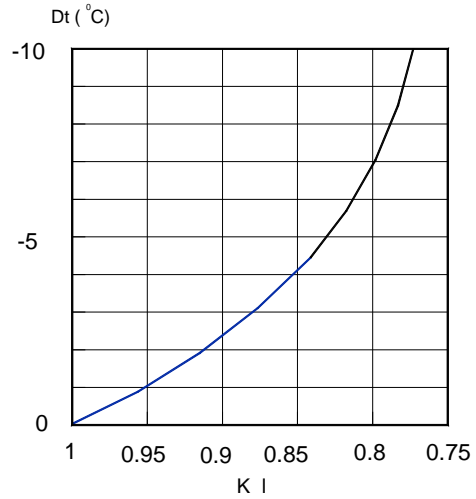

Kl = Correction factor for the throw.

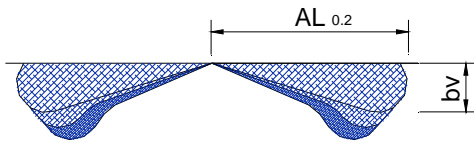

$$bv = Kh \times AL_{0.2}$$



$$AL'_{0.2} (Dt < 0) = Kl \times AL_{0.2}$$

**TEMPERATURE RATIO.**

$$\frac{Dtl}{Dtz} = \frac{t_{room} - t_x}{t_{room} - t_{supply}}$$

**INDUCTION RATIO.**


$$i = \frac{Q_r}{Q_0} = \frac{Q_{total\ at\ x}}{Q_{of\ supply}}$$

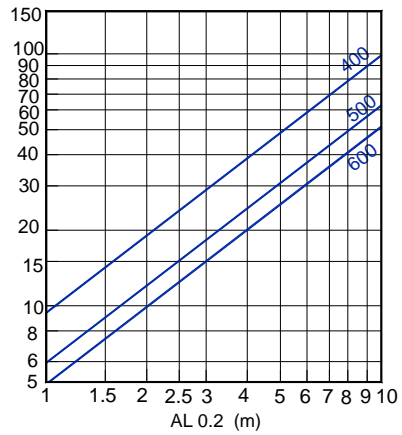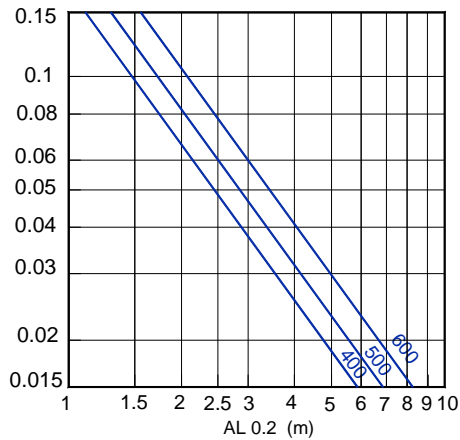



RXO-C

MADEL®



RECOMMENDED VELOCITY.

RXO-C	Vmin m/s	Vmax m/s
400	2.5	6,8
500	2.5	5
625	2.5	4.5

FREE FACE AREA (m2).


RXO-C	Afree m2	Qmin. m3/h	Qmax. m3/h
400	.0165	150	409
500	.0336	300	600
625	0.05	500	810

CORRECTION FACTOR FOR Dpt AND Lwa1.

PLXOC-R		100% Open	50% Open	10% Open
400	Dpt (Kp)	1	1.3	2
	Lwa1 (Kf)	+0	+3,2	+1,8
500	Dpt (Kp)	1	1.7	3,3
	Lwa1 (Kf)	+1	+4,5	+2
625	Dpt (Kp)	1	1.5	5,8
	Lwa1 (Kf)	+0,3	+3,5	+2,5

$$DPt1 = Kp \times DPt$$

$$Lwa = Lwa1 + Kf$$

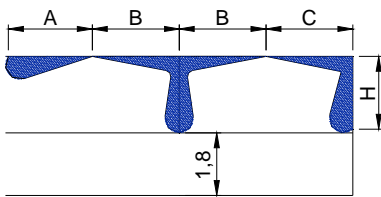


$$AL_{0,2} = A$$

$$AL_{0,2} = B+H$$


$$AL_{0,2} = C+H$$

FREE VELOCITY, PRESSURE LOSS AND SOUND POWER LEVEL,  
THROW WITH CEILING EFFECT.


RXO-C + PLXOC

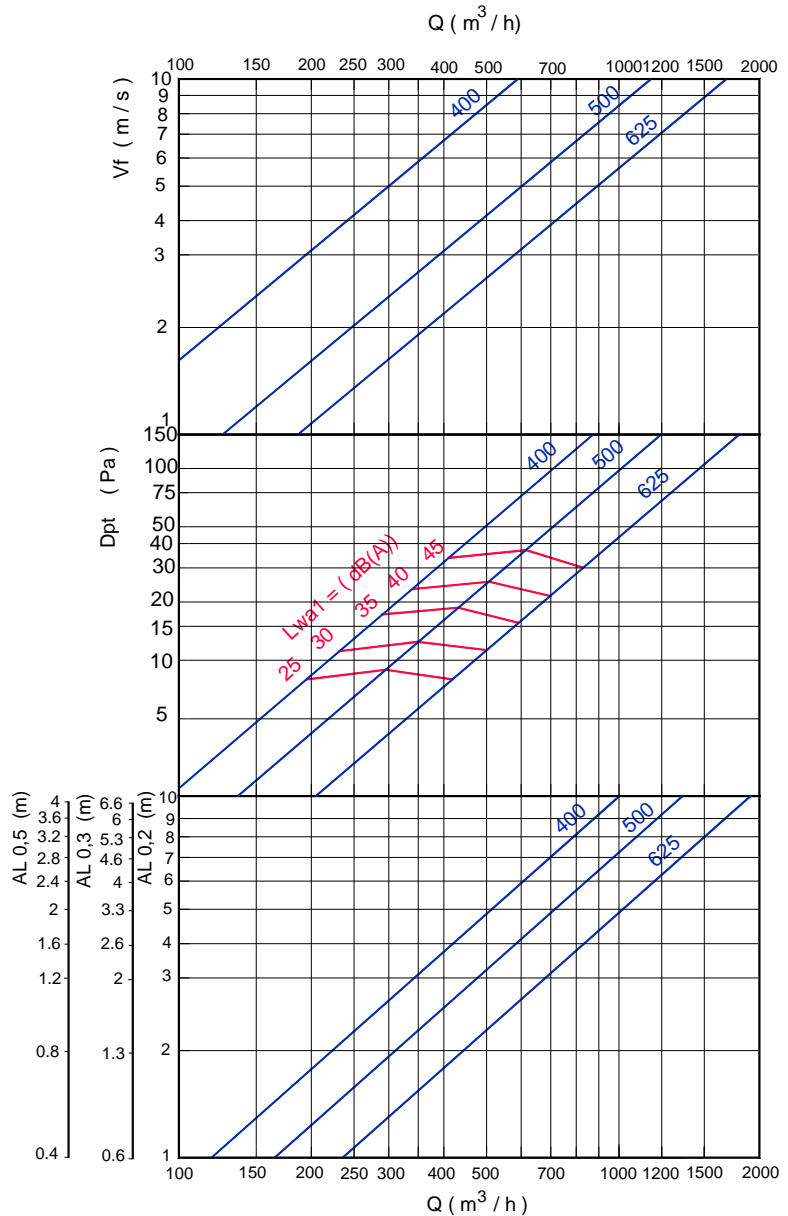

Note: In MadelMedia Octava band centre frequency in Hz.




CORRECTION FACTOR FOR VERTICAL DIFFUSION (bv) FOR DT (-).

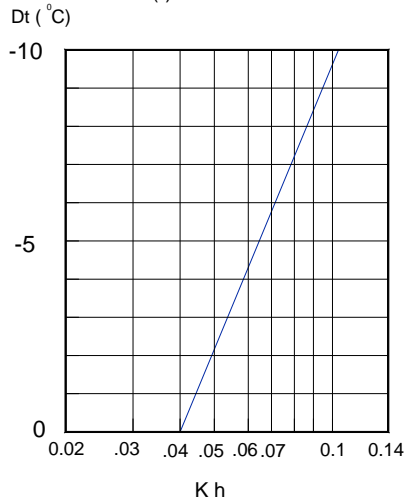


Kh = Correction factor for the vertical diffusion.

CORRECTION FACTOR FOR THROW (L0.2) DT (-).

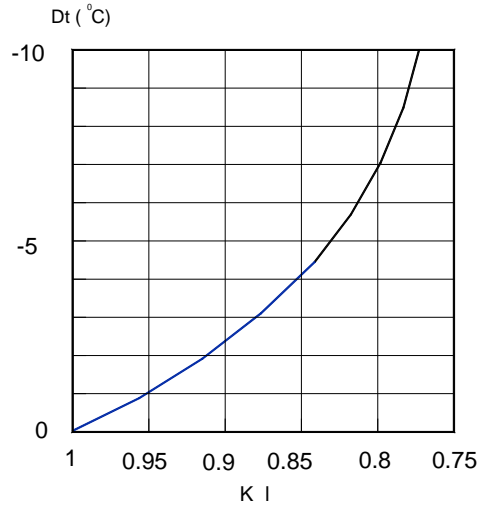

KI = Correction factor for the throw.

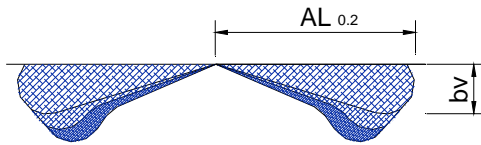

$$bv = Kh \times AL_{0.2}$$

$$AL'_{0.2} (Dt < 0) = KI \times AL_{0.2}$$

TEMPERATURE RATIO.

$$\frac{Dtl}{Dtz} = \frac{t_{room} - t_x}{t_{room} - t_{supply}}$$

INDUCTION RATIO.

$$i = \frac{Q_r}{Q_0} = \frac{Q_{total\ at\ x}}{Q_{of\ supply}}$$

