




SQR rectangular air volume control dampers

MADEL®

The **SQR** series damper are designed to be used for altering the flow volume rate and pressure in air-conditioning, ventilation and heating systems. Opposed blades of 100 mm.

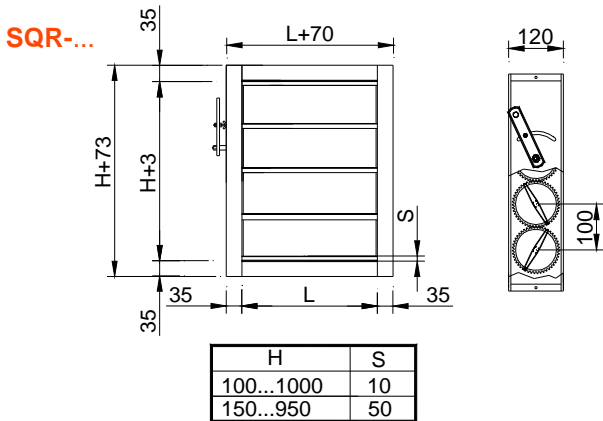

CLASSIFICATION

SQR-H Damper with rhomboidal profile blades, parallels to the largest side (L size).


SQR-V Damper with rhomboidal profile blades, parallels to the shortest side (H size).

SQR-CC Square damper with rhomboidal profile blades and circular connections.

SQR-BCC Square damper with flat profile blades and circular connections.



.../MA/ Damper with manual control lever.

.../MO/ Damper with special axle to motorise.




MATERIAL

“U” shaped extruded aluminium frame. Extruded aluminium aerodynamic Blades with a rubber seal around the edge. Galvanised steel axle. Galvanised steel protection sheet for the transmission system. High resistance bearings. Transmission by gears, placed in the external part of the dampers, to avoid dirt in the transmission.

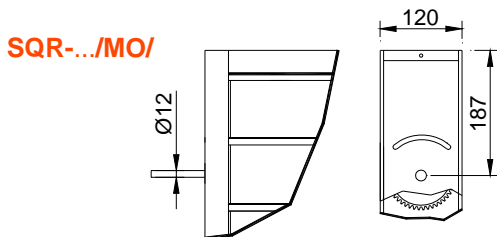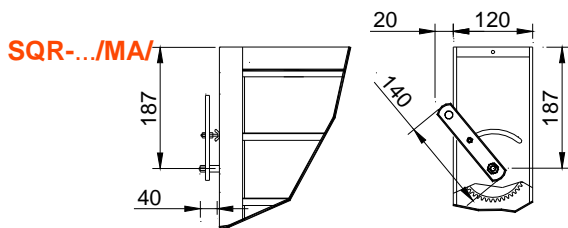

SQR-CC

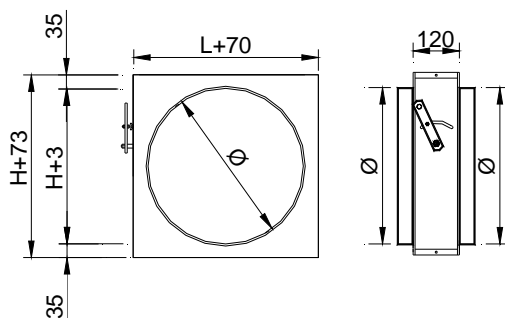

SIEMENS



BELIMO



ON/OFF actuators

- GSD141.1A-24v Siemens actuator On/Off 2N
- GSD141.1A-230v Siemens actuator On/Off 2N
- GDB141.1E-24v Siemens actuator On/Off 5N
- GDB141.1E-230v Siemens actuator On/Off 5N
- GLB141.1E-24v Siemens actuator On/Off 10N
- GLB341.1E-230v Siemens actuator On/Off 10N
- GEB141.1E -24v Siemens actuator On/Off 20N
- GEB341.1E -230v Siemens actuator On/Off 20N
- LM24A Belimo actuator On/Off 5N
- LM230A Belimo actuator On/Off 5N
- NM24A Belimo actuator On/Off 10N
- NM230A Belimo actuator On/Off 10N

ON/OFF actuators with switches device

- GDB146.1E-24v Siemens actuator On/Off 5N, 2FC
- GDB346.1E-230v Siemens actuator On/Off 5N, 2FC
- GLB146.1E-24v Siemens actuator On/Off 10N, 2FC
- GLB346.1E-230v Siemens actuator On/Off 10N, 2FC
- GEB146.1E-24v Siemens actuator On/Off 15N, 2FC
- GEB346.1E-230v Siemens actuator On/Off 15N, 2FC
- LM24A-S Belimo actuator On/Off 5N, 1FC (*)
- LM230A-S Belimo actuator On/Off 5N, 1FC (*)
- NM24A-S Belimo actuator On/Off 10N, 1FC (*)
- NM230A-S Belimo actuator On/Off 10N, 1FC (*)

** Belimo actuator with end of course switch for 2 contacts.*

ON/OFF actuators with spring return

- GPC121.1A-24v Siemens actuator On/Off 4N
- GPC321.1A-230v Siemens actuator On/Off 4N
- GMA121.1E-24v Siemens actuator On/Off 7N
- GMA321.1E-230v Siemens actuator On/Off 7N
- LF-24 Belimo actuator On/Off 4N
- LF-230 Belimo actuator On/Off 4N
- NFA Belimo actuator On/Off 24-230 VAC, 10N

ON/OFF act. with spring return and switches

- GPC126.1A-24v Siemens actuator On/Off 4N
- GPC326.1A-230v Siemens actuator On/Off 4N
- GMA126.1E-24v Siemens actuator On/Off 7N
- GMA326.1E-230v Siemens actuator On/Off 4N
- LF-24-S Belimo actuator On/Off 4N
- LF-230-S Belimo actuator On/Off 4N
- NFA-S2 Belimo actuator On/Off 24-230 VAC, 10N

Proportional actuators

- GDB161.1E-24v Siemens actuator proportional 5N
- GLB161.1E-24v Siemens actuator proportional 10N
- GEB161.1E-24v Siemens actuator proportional 15N
- LM24A-SR Belimo actuator proportional 5N
- LM230A-SR Belimo actuator proportional 5N
- NM24A-SR Belimo actuator proportional 10N
- NM230A-SR Belimo actuator proportional 10N

Proportional actuators with MODBUS

- GDB111.1E/MO-24v Siemens actuator proportional 5N
- GLB111.1E/MO-24v Siemens actuator proportional 10N
- LM24A-MOD Belimo actuator proportional 5N
- NM24A-MOD Belimo actuator proportional 10N



ACTUATORS POWER SELECTION

Note: / MO / dampers are supplied with the actuator fitted at the factory.

L x H mm	actuator N	L x H mm	actuator N	L x H mm	actuator N
200x100	5 N	700x250	5 N	700x600	5 N
300x100	5 N	800x250	5 N	800x600	5 N
400x100	5 N	900x250	5 N	900x600	5 N
500x100	5 N	1000x250	5 N	1000x600	5 N
600x100	5 N	1200x250	5 N	1200x600	5 N
700x100	5 N	1400x250	5 N	1400x600	10 N
800x100	5 N	1600x250	5 N	1600x600	10 N
900x100	5 N	1800x250	5 N	1800x600	10 N
1000x100	5 N	2000x250	5 N	2000x600	10 N
1200x100	5 N	300x300	5 N	700x700	5 N
1400x100	5 N	400x300	5 N	800x700	5 N
1600x100	5 N	500x300	5 N	900x700	5 N
1800x100	5 N	600x300	5 N	1000x700	5 N
2000x100	5 N	700x300	5 N	1200x700	5 N
200x150	5 N	800x300	5 N	1400x700	10 N
300x150	5 N	900x300	5 N	1600x700	10 N
400x150	5 N	1000x300	5 N	1800x700	10 N
500x150	5 N	1200x300	5 N	2000x700	10 N
600x150	5 N	1400x300	5 N	800x800	5 N
700x150	5 N	1600x300	5 N	900x800	5 N
800x150	5 N	1800x300	5 N	1000x800	10 N
900x150	5 N	2000x300	5 N	1200x800	10 N
1000x150	5 N	400x400	5 N	1400x800	10 N
1200x150	5 N	500x400	5 N	1600x800	10 N
1400x150	5 N	600x400	5 N	1800x800	15 N
1600x150	5 N	700x400	5 N	2000x800	15 N
1800x150	5 N	800x400	5 N	900x900	10 N
2000x150	5 N	900x400	5 N	1000x900	10 N
200x200	5 N	1000x400	5 N	1200x900	10 N
300x200	5 N	1200x400	5 N	1400x900	10 N
400x200	5 N	1400x400	5 N	1600x900	15 N
500x200	5 N	1600x400	5 N	1800x900	15 N
600x200	5 N	1800x400	5 N	2000x900	15 N
700x200	5 N	2000x400	5 N	1000x1000	10 N
800x200	5 N	500x500	5 N	1200x1000	10 N
900x200	5 N	600x500	5 N	1400x1000	10 N
1000x200	5 N	700x500	5 N	1600x1000	15 N
1200x200	5 N	800x500	5 N	1800x1000	15 N
1400x200	5 N	900x500	5 N	2000x1000	15 N
1600x200	5 N	1000x500	5 N		
1800x200	5 N	1200x500	5 N	CC	actuator
2000x200	5 N	1400x500	5 N	mm	N
300x250	5 N	1600x500	10 N	400	5 N
400x250	5 N	1800x500	10 N	450	5 N
500x250	5 N	2000x500	10 N	500	5 N
600x250	5 N	600x600	5 N	630	5 N

TEMPERATURE CONTROL

TF



TF-RC



TF Thermostat with cables for temperature control using On/Off actuator. Manual seasonal change over.

TF-RC Radio-controlled thermostat for temperature control of 1 zone, using On/Off actuator. Manual seasonal change over.

**CO2-WP
CO2-WR**



RDG 400



RDG 400 Siemens proportional temperature controller ambiance 0..10Vcc power supply 24vac with backlit digital display, selector comfort eco/off; for proportional damper actuators.

CO2-WP Proportional CO2 24vdc vac wall-mounting detector .With LED indicator. Analog output 0-10Vdc. Setpoint 600 - 800 -1000 ppm. Proportional actuator required.

CO2-D Proportional CO2 sensor for duct mounting 24vdc-vac with an output 0-10Vdc IP54. Proportional actuator required.

CO2-D



OS-360




CO2-WR Wall-mounting detector with LED indicator. Digital output (relay 5A) Setpoint 800 - 1000 -1200 Detector with relay output (ON/OFF actuator required)

OS-360 Ceiling mounting occupancy sensor, for automatic operation control of HVAC devices. 24 Vac/Vdc current drain relay signal output. Selectable ON /OFF delays.

MOUNTING ACCESSORIES

/FC/ Free-cooling kit for assembling 2 dampers at 90°.

FC



FIXING SYSTEMS

1) The frame of the damper has been designed in order to be jointed with rivets in ducts or other flat surface.

CR Flat connection flange .


SPECIFICATION TEXT

Supply and mounting of airtight damper to control the air flow volume in rectangular ducts with manual control lever series **SQR-H/MA/ LxH** constructed from raw aluminium and gears from polyamide. Manufacturer **MADEL**.

SQR SERIES


BxH (m2) (A face)

H \ B	100	200	300	400	500	600	700	800	900	1000	1100	1200
100	0,01	0,02	0,03	0,04	0,05	0,06	0,07	0,08	0,09	0,1	0,11	0,12
150	0,01	0,03	0,04	0,06	0,07	0,09	0,1	0,12	0,13	0,15	0,16	0,18
200	0,02	0,04	0,06	0,08	0,1	0,12	0,14	0,16	0,18	0,2	0,22	0,24
250	0,02	0,05	0,07	0,1	0,12	0,15	0,17	0,2	0,22	0,25	0,27	0,3
300	0,03	0,06	0,09	0,12	0,15	0,18	0,21	0,24	0,27	0,3	0,33	0,36
350	0,03	0,07	0,1	0,14	0,17	0,21	0,24	0,28	0,31	0,35	0,38	0,42
400	0,04	0,08	0,12	0,16	0,2	0,24	0,28	0,32	0,36	0,4	0,44	0,48
450	0,04	0,09	0,13	0,18	0,22	0,27	0,31	0,36	0,4	0,45	0,49	0,54
500	0,05	0,1	0,15	0,2	0,25	0,3	0,35	0,4	0,45	0,5	0,55	0,6
550	0,05	0,11	0,16	0,22	0,27	0,33	0,38	0,44	0,49	0,55	0,6	0,66
600	0,06	0,12	0,18	0,24	0,3	0,36	0,42	0,48	0,54	0,6	0,66	0,72
650	0,06	0,13	0,19	0,26	0,32	0,39	0,45	0,52	0,58	0,65	0,71	0,78
700	0,07	0,14	0,21	0,28	0,35	0,42	0,49	0,56	0,63	0,7	0,77	0,84
750	0,07	0,15	0,22	0,3	0,37	0,45	0,52	0,6	0,67	0,75	0,82	0,9
800	0,08	0,16	0,24	0,32	0,4	0,48	0,56	0,64	0,72	0,8	0,88	0,96
850	0,08	0,17	0,25	0,34	0,42	0,51	0,59	0,68	0,76	0,85	0,93	1,02
900	0,09	0,18	0,27	0,36	0,45	0,54	0,63	0,72	0,81	0,9	0,99	1,08
950	0,09	0,19	0,28	0,38	0,47	0,57	0,66	0,76	0,85	0,95	1,04	1,14
1000	0,1	0,2	0,3	0,4	0,5	0,6	0,7	0,80	0,9	1	1,1	1,2

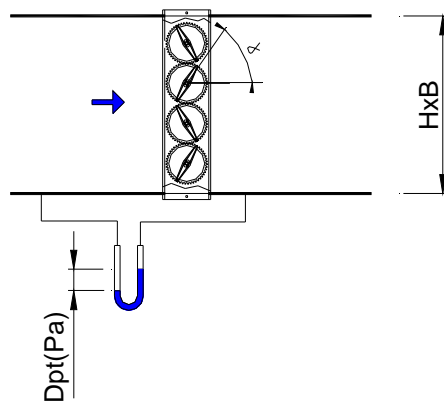


SQR SERIES

FACE VELOCITY, PRESSURE LOSS AND SOUND POWER LEVEL

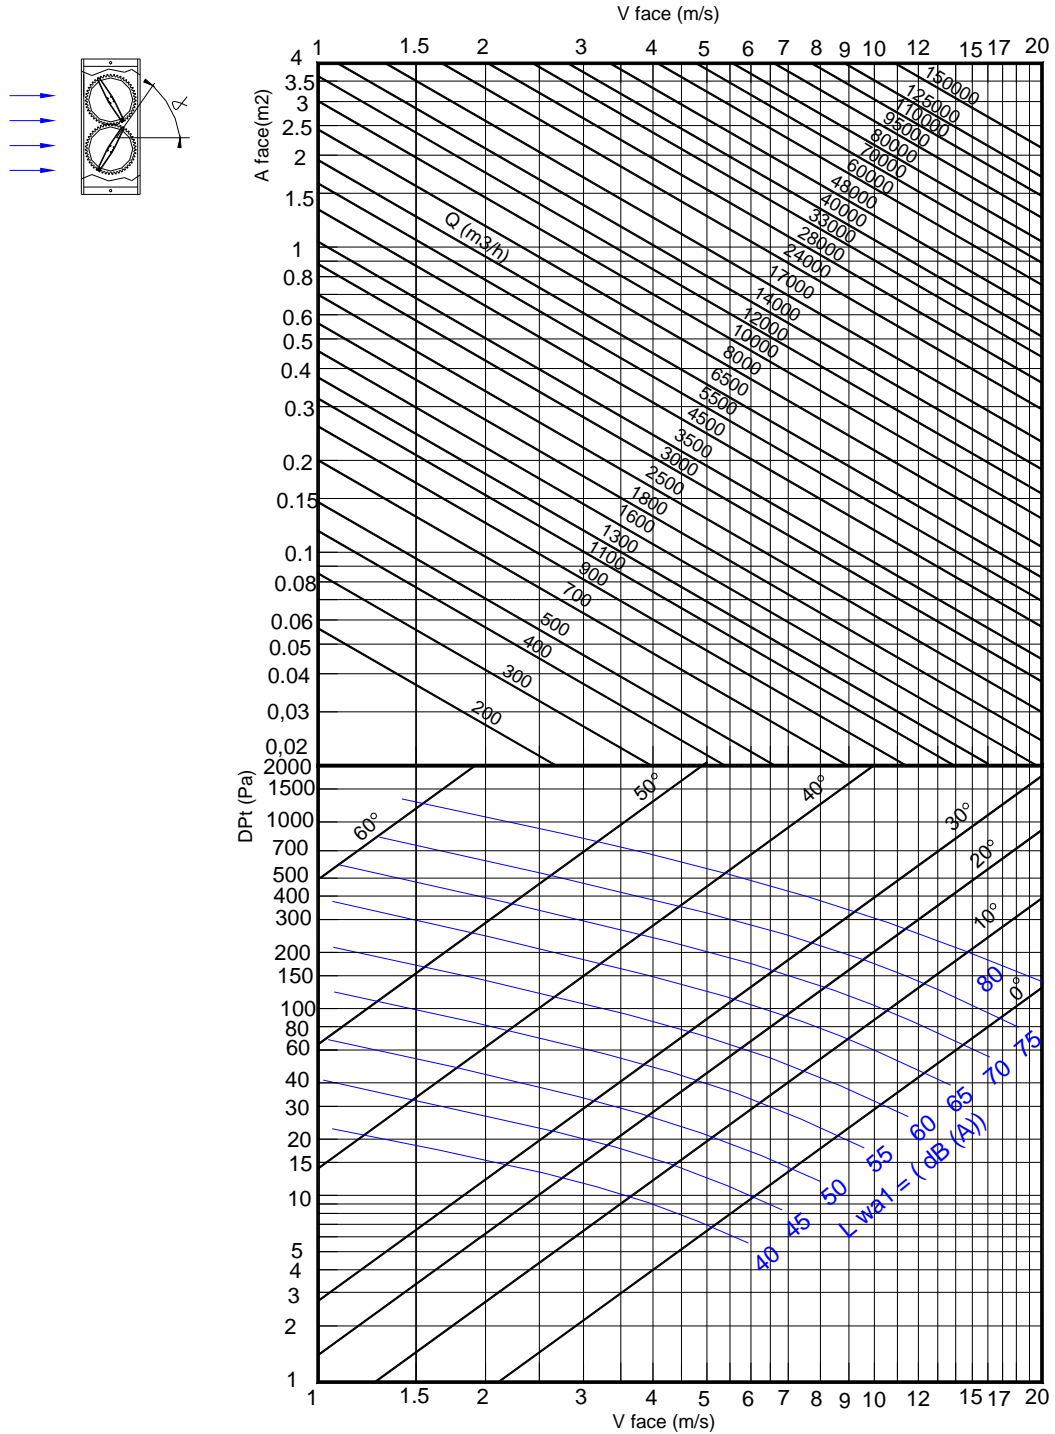


SQR SERIES

TORQUE

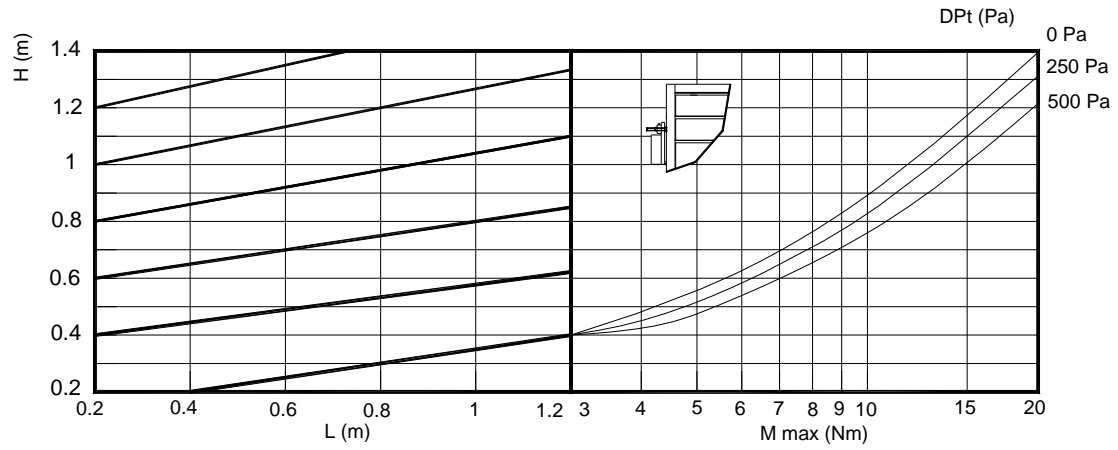

SQR-EH

LEAKAGE LOSS

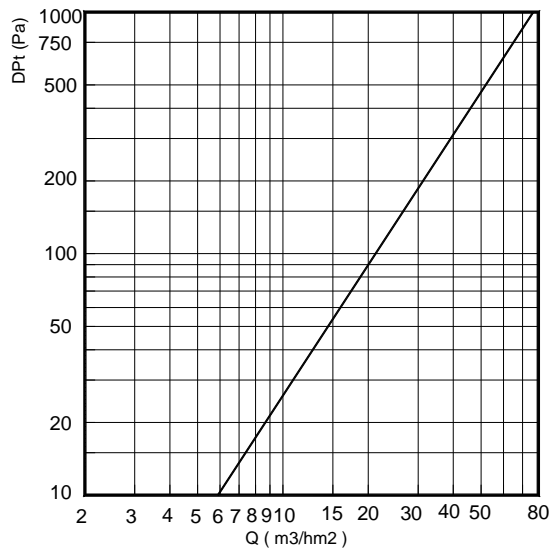


SIEMENS Wiring diagrams

ON/OFF – 3P CONTROL.

GDB / GLB 14..1E

Open-close, Single wire control


AC 24 V 
DC 24 V ... 48 V ...



GDB / GLB 14..1E

Open-close, Two wire control

AC 24 V 
DC 24 V ... 48 V ...




GDB / GLB 14..1E

GEB 13..1E


Three-position control


AC 24 V 
DC 24 V ... 48 V ...

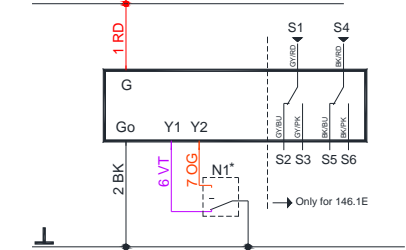

GDB / GLB 34..1E


Open-close, Single wire control


AC 100 ... 240 V 

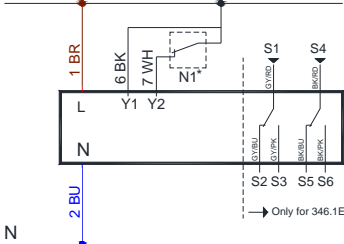

GDB / GLB 34..1E

Open-close, Two wire control


AC 100 ... 240 V 

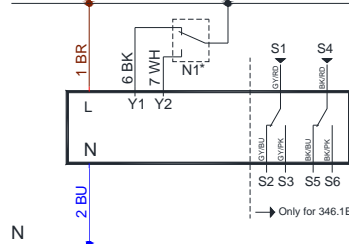


GDB / GLB 34..1E

GEB 33..1E

Three-position control

AC 100 ... 240 V 

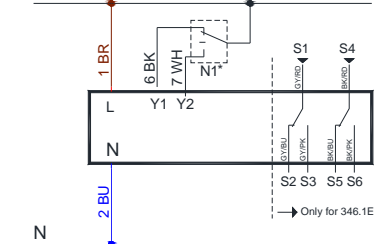


SPRING RETURN - ON/OFF – Two-position control

GMA 121.1E


Two-position control


AC 24 V 
DC 24 V ... 48 V ...



GMA 321.1E

Two-position control

AC 100 ... 240 V 



N1*. Accessory control. See wiring diagrams accessories.


Wiring	Code	N°	Color	Description	
Actuators AC 24 V~ DC 24..48V	G	1	RD Red	System potential 24 AC/DC	
	G0	2	BK Black	System Neutral	
	Y1	6	VT Purple	Positioning AC/DC 0V. cw	
	Y2	7	OG Orange	Positioning AC/DC 0V. ccw	
	Y	8	GY Grey	Signal in (0-10V)	
	U	9	PK Pink	Signal out (0-10 V)	
	Actuators AC 230 V~	L	3	BR Brown	Line 100 .. 240 AC
		N	4	BU Blue	Neutral conductor
		Y1	6	BK Black	Positioning AC 230V. cw
Y2		7	WH White	Positioning AC 230V. ccw	
G+		1	RD Red	Potential aux. 24 AC/DC	
G-		2	BK Black	Neutral aux. 24 AC/DC	
Y		8	GY Grey	Signal in (0-10V)	
U	9	PK Pink	Signal out (0-10 V)		
Auxiliary contacts	Q11	S1	GY/RD	Input switch A	
	Q12	S2	GY/BU	Contact NC switch A	
	Q14	S3	GY/PK	Contact NO switch A	
	Q21	S4	BK/RD	Input switch B	
	Q22	S5	BK/BU	Contact NC switch B	
	Q24	S6	BK/PK	Contact NO switch B	

MODULATING control 0-10 V

GDB / GLB / GEB 16..1E

Modulating control


AC 24 V 
DC 24 V ... 48 V ...



GDB / GLB 36..1E

Modulating control

AC 100 ... 240 V 

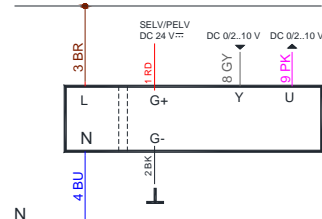


This information is provided by way of indication.
Consult the manufacturer catalogue for all updated
documentation.

<https://www.buildingtechnologies.siemens.com/bt/global/en/products/HVAC-Products/Damper-actuators/Actuators-for-HVAC-applications/Pages/Actuators-for-HVAC-applications-default.aspx>


BELIMO Wiring diagrams

ON/OFF – 3P CONTROL.


LM-24A..(S)
NM-24A..(S)
AC/DC 24 V, Open-close

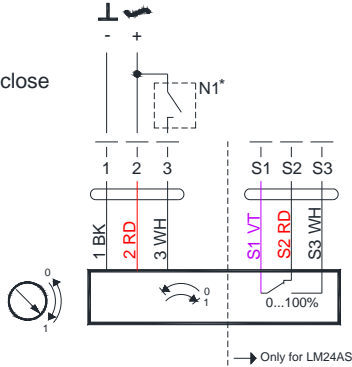


LM-24A..(S)
NM-24A..(S)
AC/DC 24 V, 3-point

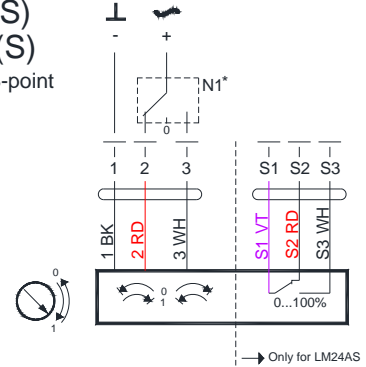

LM-230A..(S)
NM-230A..(S)
AC 230 V, Open-close

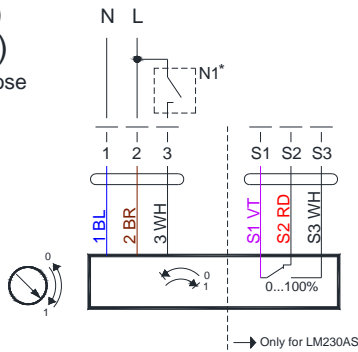


LM-230A..(S)
NM-230A..(S)
AC 230V, 3-point

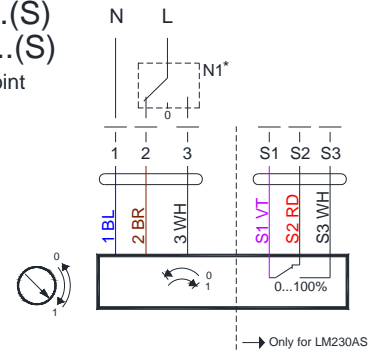


SPRING RETURN - ON/OFF – Two-position control

LM-230A..(S)
NM-230A..(S)
AC 230 V, Open-close



LM-230A..(S)
NM-230A..(S)
AC 230V, 3-point




N1*. Accessory control. See wiring diagrams accessories.


Wiring	Code	N°	Color	Description
Actuators Open-close AC 24 V~ DC 24..48V	-	1	BK Black	System Neutral
	+	2	RD Red	System potential 24 AC/DC
		3	WH White	Positioning AC/DC 0V.
Actuators modulating AC-DC 24 V AC 230V	-	1	BK Black	System Neutral
	+	2	RD Red	System potential 24 AC/DC
		3	WH White	Signal in (0) 2-10V
		5	OG Orange	Signal out 2-10V
Actuators AC 230 V~	L	1	BU Blue	Line 100 .. 240 AC
	N	2	BR Brown	Neutral conductor
	G+	1	BK Black	Neutral aux. 24 AC/DC
	G-	2	RD Red	SG..24
	U	3	WH White	Signal in (0-10V)
	5	OG Orange	Signal out (0-10 V)	
Auxiliary contacts	S1	S1	VT Violet	Input switch A
	S2	S2	RD Red	Contact NC switch A
	S3	S3	WH White	Contact NO switch A

MODULATING control 0-10 V

LM24A-SR
NM24A-SR
AC/DC 24 V, Modulating



LM230A-SR
NM230A-SR
AC 230 V, Modulating





This information is provided by way of indication.
Consult the manufacturer catalogue for all updated
documentation.

<http://www.belimo.ch/CH/EN/PDF/index.cfm>



TF Wiring diagrams

TF + SIEMENS actuators

AC/DC 24 V - ON/ OFF control

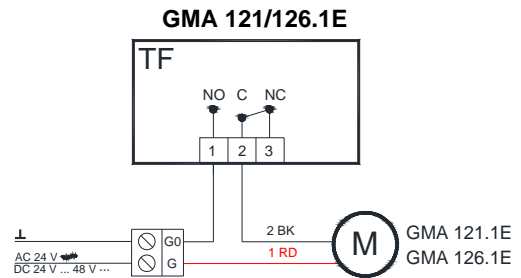
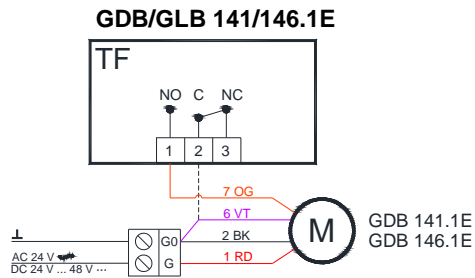


AC 230 V - ON/ OFF control

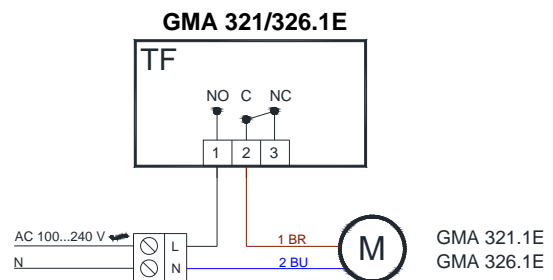
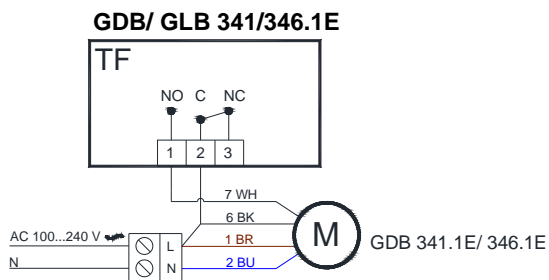


TF + BELIMO actuators

AC/DC 24 V - ON/ OFF control

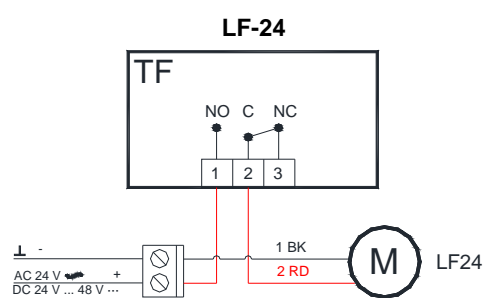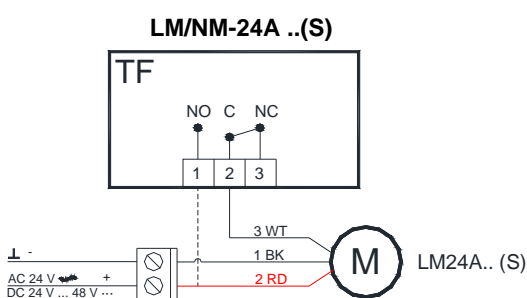

AC 230 V - ON/ OFF control

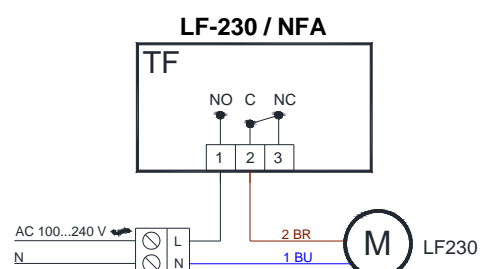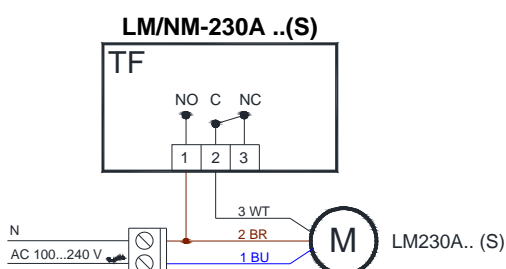


RDG400 Wiring diagrams


RDG 400 + SIEMENS actuators

Modulating control + manual changeover

GDB/GLB 161.1E

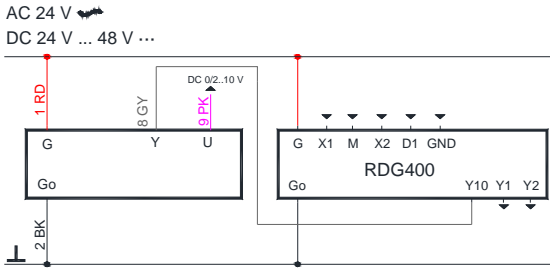


GDB/ GLB 361.1E

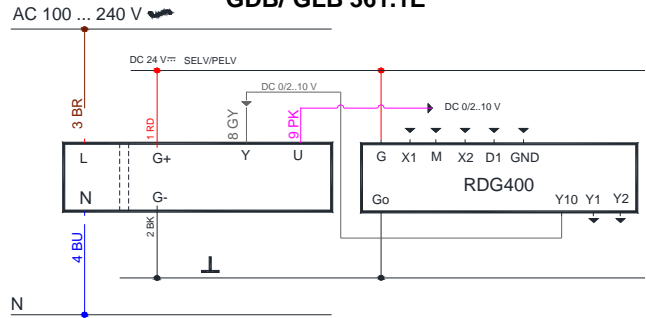


RDG 400 + BELIMO actuators

Modulating control + manual changeover

LM/ NM-24A -SR

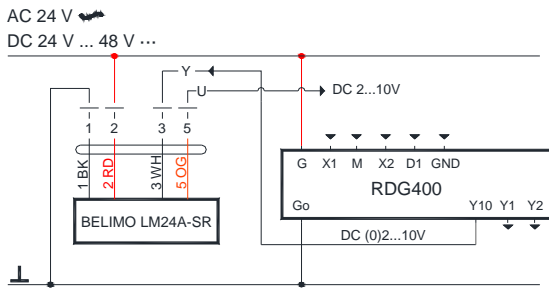


LM/NM230A-SR

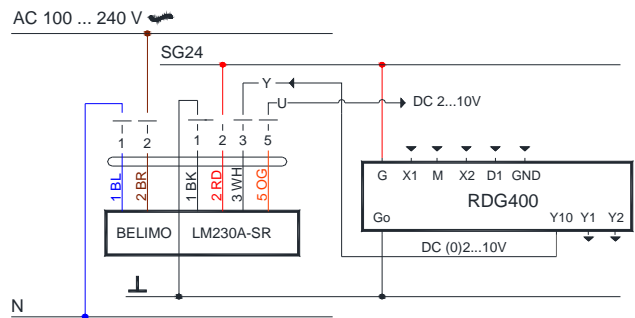

CO2-WR Wiring diagrams


CO2-WR+ SIEMENS GDB/GLB 141.1E

On/OFF control

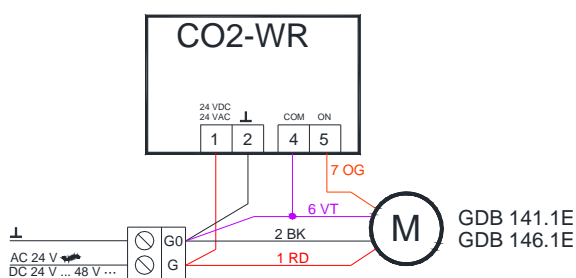

CO2-WR+ BELIMO LM/NM24A.. (S)

On/OFF control

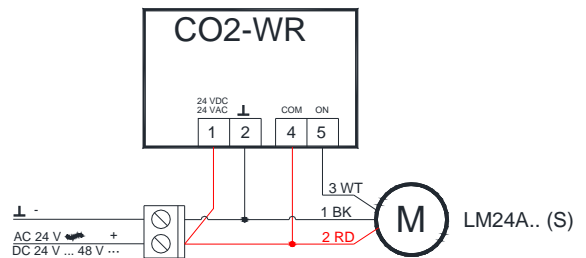


	J4	J5	Relay
800 ppm	disconnected	disconnected	CO2 > 900 ppm. Relay ON; CO2 < 700 ppm Relay OFF
1000 ppm	connected	disconnected	CO2 > 1100 ppm. Relay ON; CO2 < 900 ppm Relay OFF
1200 ppm (default)	disconnected	connected	CO2 > 1200 ppm. Relay ON; CO2 < 1100 ppm Relay OFF
1400 ppm	connected	connected	CO2 > 1500 ppm. Relay ON; CO2 < 1300 ppm Relay OFF


CO2-WP Wiring diagrams

CO2-WP + SIEMENS actuators

AC/DC 24 V – Modulating control GDB/GLB 161.1E

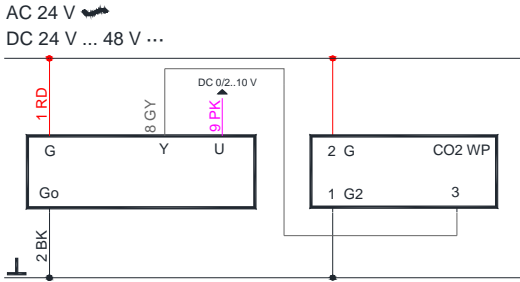


AC 230 V – Modulating control GDB/GLB 361.1E

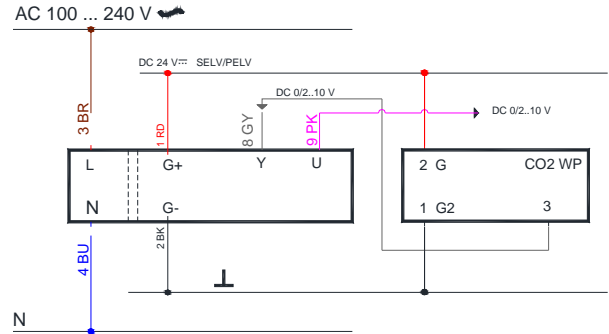


CO2-WP + BELIMO actuators

AC/DC 24 V – Modulating control LM/NM 24A-SR

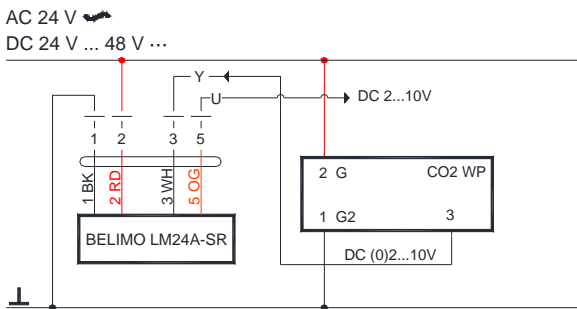


AC 230 V – Modulating control

LM/ NM 230A - SR

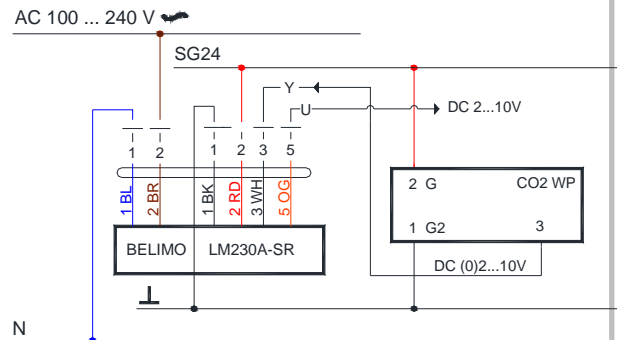

CO2-WP Setting

J3 J1 J2 S1 S2



J4 J5

	J1	J2
0-10 VDC (default)	disconnected	disconnected
2-10 VDC	connected	disconnected


	J3
PID out put (default)	disconnected
Linear output	connected

	J4	J5
350 ppm	disconnected	disconnected
500 ppm	connected	disconnected
800 ppm (default)	disconnected	connected
1200 ppm	connected	connected


CO2-D Wiring diagrams

CO2-WD + SIEMENS actuators

**AC/DC 24 V – Modulating control
GDB/GLB 161.1E**

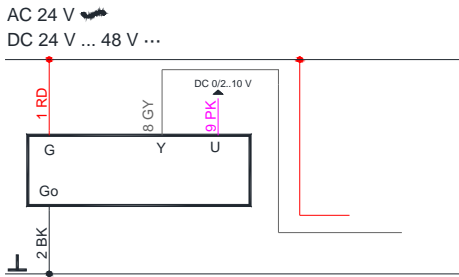


**AC 230 V – Modulating control
GDB/GLB 361.1E**

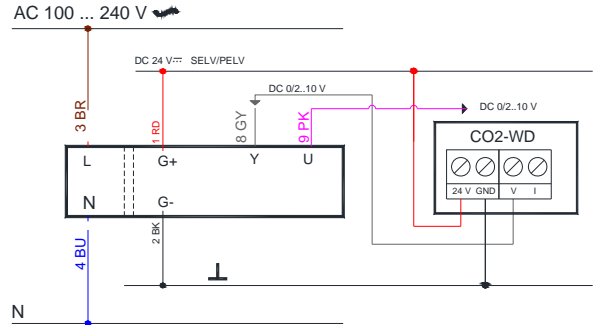


CO2-WD + BELIMO actuators

**AC/DC 24 V – Modulating control
LM/NM24A-SR**

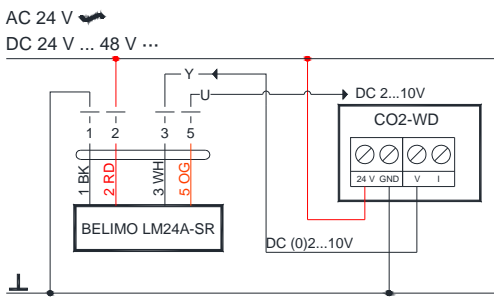

AC 230 V – Modulating control


LM/NM230A - SR

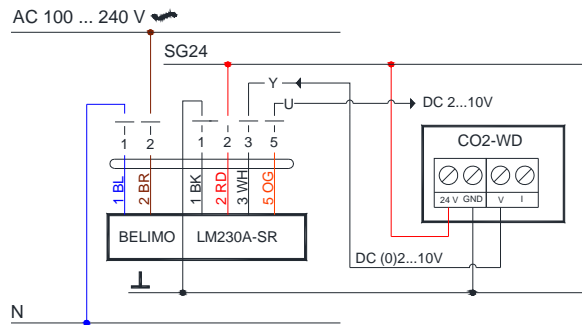


OS-360 Wiring diagrams

OS360+ SIEMENS GDB/GLB 141.1E

On/OFF control

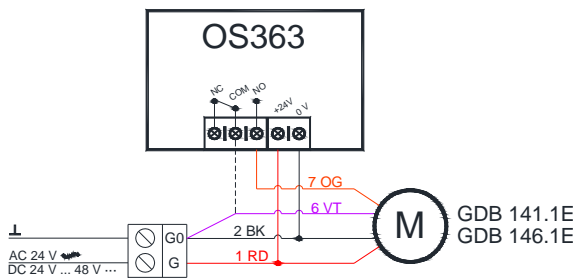


DELAY SETTING



OS360+BELIMO LM/NM 24A.. (S)

On/OFF control

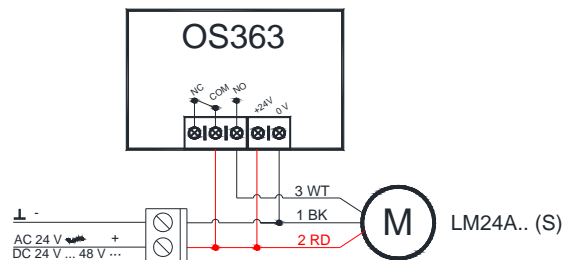

	A	B	C	D	E	F
ON	0 sec	10 sec	30 sec	1 min	5 min	10 min
OFF	10 sec	1 min	5 min	10 min	20 min	30 min